

OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER

SECTION 13 TOWNSHIP 15 RANGE 2

DATE: 1-16-05 3-24-06

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 5-1-95

IN. S.P.C. E ZONE NAD '83

NAME: 15021301

N: 499941.4612(m)

E: 48303.1606(m)

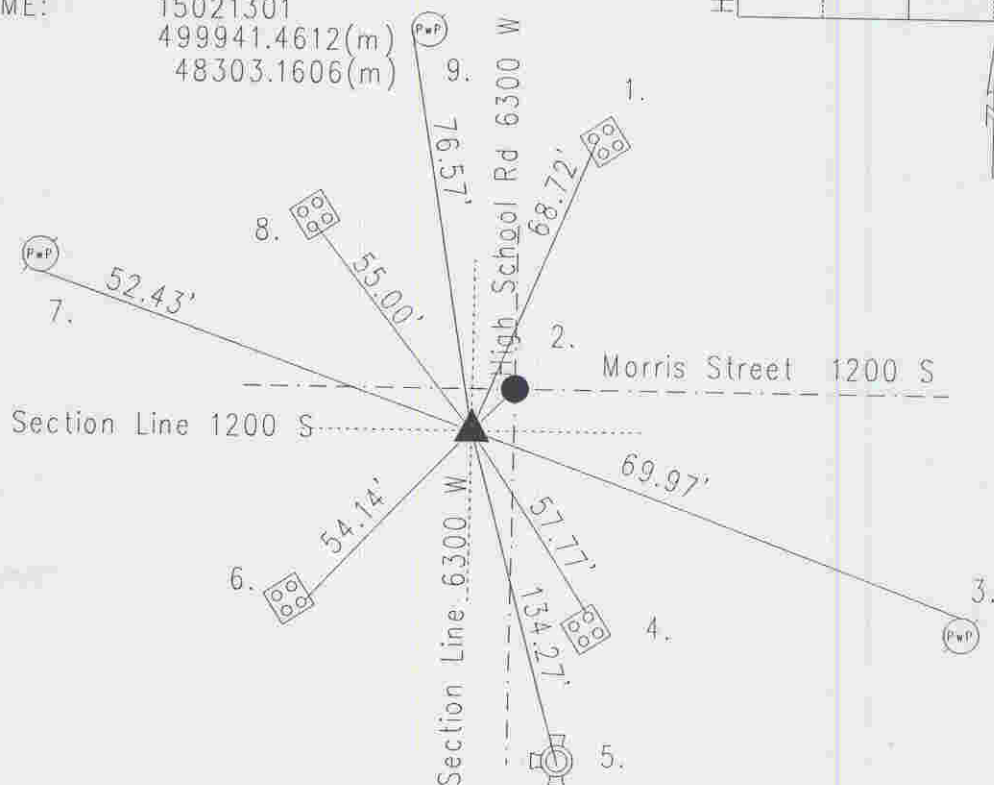

Original set 1820 by Laughlin with witness: 12" sugar N 59 E 22 links; 4" elm S 5 W 12 links per Marion County Atlas pg. 2. Hosbrook 4-30-1850 called no stone/witness per Wayne Township Legal Survey Book pg. 30. Woerner 7-26-48 called railroad spike. Monroe 6-13-51 called same. Fleener 7-11-60 called the same. G.S.W. 10-11-63 called same. G.W.S. 4-20-64 called same. Hylden 8-9-74 called same. Gries 10-10-86 called same. Whiteside 1-17-95 called PK nail. Excavated by Kiste 5-1-95 axle found 6" down. Stone found 1" down. Harrison set. Re-tied 5-1-00 by Kiste. Re-tied 1-16-05 by Wilcoxon.
15021301

REF.	DISTANCE	DESCRIPTION
1.	68.72'	Cut 'x' NW bolt of signal pole base
2.	3.79'	C/I C/I Harrison marker NE of corner
3.	69.97'	PK nail N PwP#143-554A 10"up
4.	57.77'	Cut 'x' N bolt of signal pole base
5.	134.27'	Tap nut of fire hydrant
6.	54.14'	Cut 'x' E-bolt of signal pole base
7.	52.43'	PK nail SW PwP#71-553A 12"up
8.	55.00'	Cut 'x' S bolt of signal pole base
9.	76.57'	PK nail W PwP#73-553A 10"up